

# MS906

## Skid Steer

The aggressive, self-cleaning tread design & sidewall protection provides high traction and durability in tough & demanding applications.


- Wear & cut resistant tread compound
- Self-cleaning, stepped tread
- Reduced vibration & increased stability
- Excellent grip and full flat profile
- Reinforced shoulder, sidewall and bead for enhanced stability
- Deep under tread for improved puncture resistance



### Applications



### Footprint

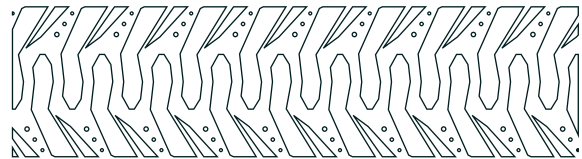

Size	PR	Type	Rim	Load Capacity at 10 km/h	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
5.70-12	6	TT	4.50	650	in.	18/32	5.7	22.4
					mm	14	145	569
27x10-12	14	TT	8.00G	3550	in.	24/32	10.4	27.6
					mm	19	264	701
23x8.50-12	6	TL	7JA	820	in.	17/32	8.5	22.9
					mm	13	214	583
23x8.50-12	8	TL	7JA	975	in.	17/32	8.5	22.9
					mm	13	214	583
23x8.50-12	12	TL	7JA	1215	in.	17/32	8.5	22.9
					mm	13	214	583
27x8.50-15	8	TL	7JA	1305	in.	18/32	8.7	26.9
					mm	14	221	682
7.00-15	6	TL	5.50F	1440	in.	21/32	7.8	29.9
					mm	16	198	760
7.00-15	8	TL	5.50F	1650	in.	21/32	7.8	29.9
					mm	16	198	760
31/15.50-15	8	TL	13.00	1980	in.	30/32	15.1	31.0
					mm	23	384	787
10-16.5	10	TL	8.25	2135	in.	21/32	10.7	30.2
					mm	16	271	768
12-16.5	12	TL	9.75	2865	in.	25/32	13.0	32.8
					mm	20	331	834
14-17.5	14	TL	10.50	3875	in.	33/32	14.2	36.2
					mm	26	360	920
15-19.5	14	TL	11.75	4565	in.	33/32	15.3	40.2
					mm	26	389	1020
15-19.5	16	TL	11.75	4935	in.	33/32	15.3	40.2
					mm	26	389	1020